


Auto Engine Intelligence Fan Electromagnetic Clutch Bearing

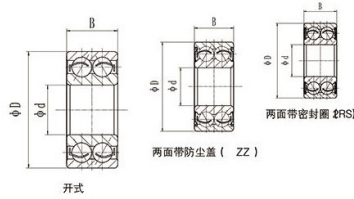

| select Inquiry | Dimensions(mm) | | | Bearing Type | | | Load Rating(N) | | Limit Speed(r/min) | |
|----------------|----------------|------|------|--------------|-------------|-------|----------------|-------|--------------------|--------|
| | d | D | B | Open | ZZ | 2RS | Cr | Cor | Oil | Grease |
| 17 | 40 | 17.5 | 5203 | 5203 ZZ | 5203 2RS | 14200 | 8800 | 11000 | 15000 | |
| 17 | 47 | 22.2 | 5303 | 5303 ZZ | 5303 2RS | 23100 | 12700 | 10000 | 14000 | |
| 20 | 47 | 20.6 | 5204 | 5204 ZZ | 5204 2RS | 19000 | 12100 | 9500 | 13000 | |
| 20 | 52 | 22.2 | 5304 | 5304 ZZ | 5304 2RS | 21700 | 13300 | 9000 | 11000 | |
| 25 | 52 | 20.6 | 5205 | 5205 ZZ | 5205 2RS | 20600 | 14300 | 8000 | 11000 | |
| 25 | 62 | 25.4 | 5305 | 5305 ZZ | 5305 2RS | 32000 | 21600 | 7300 | 10000 | |
| 30 | 55 | 19 | 3006 | 3006 ZZ | 3006 2RS | 16200 | 13000 | 7500 | 10000 | |
| 30 | 62 | 23.8 | 5206 | 5206 ZZ | 5206 2RS | 25900 | 18700 | 7000 | 9500 | |
| 30 | 72 | 30.2 | 5306 | 5306 ZZ | 5306 2RS | 41500 | 29000 | 7000 | 9500 | |
| 35 | 72 | 27 | 5207 | 5207 ZZ | 5207 2RS | 35000 | 25900 | 6000 | 8000 | |
| 35 | 80 | 34.9 | 5307 | 5307 ZZ | 5307 2RS | 48800 | 34000 | 6000 | 8000 | |
| 40 | 80 | 30.2 | 5208 | 5208 ZZ | 5208 2RS | 40000 | 30500 | 5300 | 7200 | |
| 40 | 90 | 36.5 | 5308 | 5308 ZZ | 5308 2RS | 56500 | 41000 | 5300 | 7200 | |

Auto Engine Intelligence Fan Electromagnetic Clutch Bearing

| | | | | | | | | | |
|----|-----|------|------|------------|-------------|-------|-------|------|------|
| 45 | 85 | 30.2 | 5209 | 5209 ZZ | 5209 2RS | 42500 | 34500 | 5000 | 6700 |
| 45 | 100 | 39.7 | 5309 | 5309 ZZ | 5309 2RS | 68500 | 51000 | 5000 | 6700 |
| 50 | 90 | 30.2 | 5210 | 5210 ZZ | 5210 2RS | 45000 | 39000 | 5000 | 6700 |
| 50 | 110 | 44.4 | 5310 | 5310 ZZ | 5310 2RS | 81500 | 61500 | 4500 | 6000 |